


111 150**Spiralbohrer HSS Links DIN 338**
HSS Drills Left Hand DIN 338

- Breiter Anwendungsbereich
- Linksschneidend für Drehmaschinen
- Kegelmantelanschleiff
- Oberfläche blank
- Broad field of application
- Left hand cutting for lathes
- Conventional point
- Bright finish

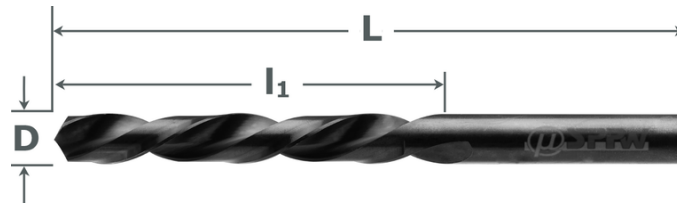

HSS	blank
DIN 338	Typ N
118°	ZYL
LH links	

D

ØD h8	L	l1	Art. No.	Stk/pce Euro	ØD h8	L	l1	Art. No.	Stk/pce Euro	ØD h8	L	l1	Art. No.	Stk/pce Euro
1	34	12	1111500100	4,05	4,2	75	43	1111500420	5,20	7,5	109	69	1111500750	10,80
1,5	40	18	1111500150	3,50	4,5	80	47	1111500450	5,55	8	117	75	1111500800	12,30
1,8	46	22	1111500180	3,40	5	86	52	1111500500	5,55	8,5	117	75	1111500850	13,00
2	49	24	1111500200	3,20	5,2	86	52	1111500520	6,45	9	125	81	1111500900	16,20
2,5	57	30	1111500250	3,65	5,5	93	57	1111500550	6,85	9,5	125	81	1111500950	16,70
3	61	33	1111500300	3,80	6	93	57	1111500600	7,10	10	133	87	1111501000	18,70
3,2	65	36	1111500320	4,15	6,2	101	63	1111500620	8,80	10,5	133	87	1111501050	22,51
3,3	65	36	1111500330	4,25	6,5	101	63	1111500650	8,50	11	142	94	1111501100	24,50
3,5	70	39	1111500350	3,95	6,8	109	69	1111500680	10,25	12	151	101	1111501200	29,90
4	75	43	1111500400	4,35	7	109	69	1111500700	9,50	13	151	101	1111501300	39,91

— INFO —**Spiralbohrer aus HSS für NE-Metalle**

- 111180 DIN 338 Typ H „Messing“ mit 17° Spirale
- 111170 DIN 338 Typ W „Alu“ mit 40° Spirale

**Twist Drills DIN 338 for NF-Metals**

- 111180 DIN 338 type H „brass“ with 17° helix
- 111170 DIN 338 type W „aluminum“ with 40° helix

