


111 170

Spiralbohrer HSS Typ W Aluminium 5xØ HSS Drills Type W Aluminium 5xØ



- Alu und langspannende Material
- Normale Kerndicke, minimaler Anstieg
- Extra weite Spannuten
- Ausspitzung ähnlich DIN 1412 B
- Oberfläche blank
- Aluminum, long chipping materials
- Standard core diameter, minimal taper
- Extra wide and deep flutes
- Point similar DIN 1412 B
- Bright finish

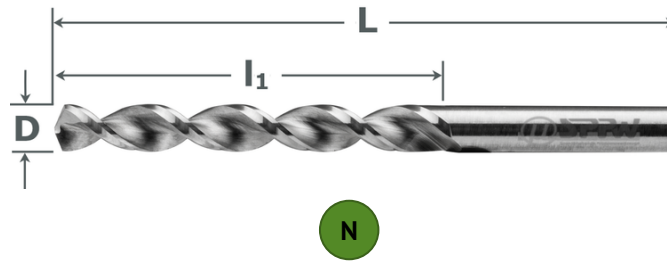

HSS	blank
DIN 338	Typ W
135°	ZYL
5xØ	

D

ØD h8	L	l1	Art. No.	Stk/pce Euro	ØD h8	L	l1	Art. No.	Stk/pce Euro	ØD h8	L	l1	Art. No.	Stk/pce Euro
2,5-2,6	57	30	111170xxxx	2,49	4,9	86	52	1111700490	3,89	8	117	75	1111700800	8,29
2,8-2,9	61	33	111170xxxx	3,59	5	86	52	1111700500	4,29	8,5	117	75	1111700850	8,89
3	61	33	1111700300	2,69	5,1-5,2	86	52	111170xxxx	4,19	9	125	81	1111700900	10,09
3,1-3,3	65	36	111170xxxx	2,89	6	93	57	1111700600	5,39	10,5	133	87	1111701050	9,15
3,4-3,7	70	39	111170xxxx	3,79	6,5	101	63	1111700650	5,99	11	142	94	1111701100	17,39
3,8	75	43	1111700380	5,79	6,8	109	69	1111700680	7,29	11,5	142	94	1111701150	16,62
4	75	43	1111700400	3,19	7	109	69	1111700700	6,49	12	151	101	1111701200	22,09
4,1-4,2	75	43	111170xxxx	3,19	7,2	109	69	1111700720	10,19	12,5	151	101	1111701250	20,27
4,3-4,7	80	47	111170xxxx	4,19	7,5	109	69	1111700750	7,89	13	151	101	1111701300	20,79