


111 180

Spiralbohrer HSS DIN 338 Typ H17° 5xØ HSS Drills DIN 338 Type H17° 5xØ



- Kurzspanende NE-Metalle
- Normale Kerndicke, minimaler Anstieg
- Kegelmantelanschleiff
- Oberfläche blank
- Short chipping NF-metals
- Standard core diameter, minimal taper
- Conventional point
- Bright finish

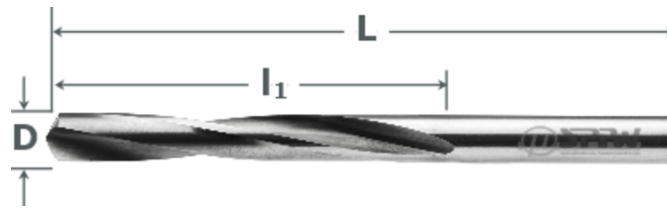

N

HSS	blank
DIN 338	Typ H
118°	ZYL
5xØ	

D

ØD h8	L	l1	Art. No.	Stk/pce Euro	ØD h8	L	l1	Art. No.	Stk/pce Euro	ØD h8	L	l1	Art. No.	Stk/pce Euro
1	34	12	1111800100	2,29	4,5	80	47	1111800450	3,29	8	117	75	1111800800	6,89
1,25	38	16	1111800125	2,59	4,75	80	47	1111800475	4,49	8,25	117	75	1111800825	12,69
1,5	40	18	1111800150	2,29	5	86	52	1111800500	4,29	8,5	117	75	1111800850	7,89
2	49	24	1111800200	2,09	5,25	86	52	1111800525	5,29	9	125	81	1111800900	8,29
2,25	53	27	1111800225	2,49	5,5	93	57	1111800550	4,29	9,5	125	81	1111800950	9,69
2,5	57	30	1111800250	2,09	5,75	93	57	1111800575	6,49	10	133	87	1111801000	10,09
2,75	61	33	1111800275	2,89	6	93	57	1111800600	4,69	10,5	133	87	1111801050	12,09
3	61	33	1111800300	2,29	6,25	101	63	1111800625	6,49	11	142	94	1111801100	13,49
3,25	65	36	1111800325	2,89	6,5	101	63	1111800650	5,19	11,5	142	94	1111801150	16,29
3,5	70	39	1111800350	2,49	6,75	109	69	1111800675	7,79	12	151	101	1111801200	17,49
3,75	70	39	1111800375	3,69	7	109	69	1111800700	5,49	12,5	151	101	1111801250	19,89
4	75	43	1111800400	2,69	7,25	109	69	1111800725	10,29	13	151	101	1111801300	21,29
4,25	75	43	1111800425	3,99	7,5	109	69	1111800750	6,39					