


**731 170 HC**

## Bohrreibahlen VHM+Dia.HC für Faserwerkstoffe 3 Schneiden Carbide Drill Reamers+Dia.HC for FRP 3 Flutes



- Delaminierungsfreies Bohren von CFK
- Spezielle Geometrie
- Empfohlene Einsatztiefe  $2 \times \varnothing$
- Oberfläche Dia.HC beschichtet
- Delamination free drilling of CFRP
- Special geometry
- Drilling depth recommended  $2 \times \varnothing$
- With Dia.HC coating

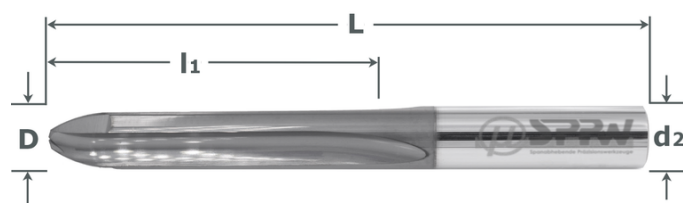

VHM	Dia HC
z:3	DIN 6535HA
OAL 100	GFK CFK

ØD H7	Ød2 h6	L	l1	Art. No.	Stk/pce Euro	ØD H7	Ød2 h6	L	l1	Art. No.	Stk/pce Euro
2	2	100	50	7311700200HC	40,80	6	6	100	50	7311700600HC	60,60
2,48	2,48	100	50	7311700248HC	40,80	7	7	100	50	7311700700HC	67,90
3	3	100	50	7311700300HC	45,80	7,92	7,92	100	50	7311700792HC	78,50
3,17	3,17	100	50	7311700317HC	45,80	8	8	100	50	7311700800HC	78,50
4	4	100	50	7311700400HC	48,20	8,63	8,63	100	50	7311700863HC	93,50
4,21	4,21	100	50	7311700421HC	51,00	9	9	100	50	7311700900HC	93,50
4,82	4,82	100	50	7311700482HC	54,70	10	10	100	50	7311701000HC	81,30
5,05	5,05	100	50	7311700505HC	56,30	12	12	100	50	7311701200HC	103,30
5,53	5,53	100	50	7311700553HC	56,30						

D